



GentleSpace Gen3

BY480X LED130S/840 WB GC SI ACW-L BR

New Highbay - 840 neutral white - Power supply unit with DALI interface - Wide beam - Silver RAL 9006

With the third generation of the GentleSpace high-bay luminaire, we continue to bring innovations to the market by offering adaptable high bay lighting solutions for high ceiling and industrial applications. GentleSpace gen3 offers a wide variety of options in terms of optics and beam angles (from very narrow to wide), a choice of mounting possibilities and cover materials and a variety of lumen packages. This means that GentleSpace gen3 can easily help you create a tailor-made and ideal lighting solution for almost any high ceiling and/or industrial application. It can also support changes in application requirements (such as layout changes) thanks to its flexible optical system, which can be easily adjusted even after installation. In addition, GentleSpace gen3 also provides the option of advanced connectivity and is ready to be connected to IoT-based systems and software applications such as the Interact Industry. Overall, whether you are looking for a reliable 'fit and forget' solution, or one that can be adapted and controlled after installation, GentleSpace gen3 is the ideal solution for your application.

Product data

| General Information | | Control interface | |
|-------------------------------|--|----------------------|---|
| Beam angle of light source | 114 ° | Control interface | DALI |
| Light source colour | 840 neutral white | Connection | External connector |
| Light source replaceable | Yes | Cable | Cord with plug Wieland/Adels compatible 5-pole |
| Number of gear units | 1 unit | Protection class IEC | Safety class I |
| Driver/power unit/transformer | PSD [Power supply unit with DALI interface] | Glow-wire test | Temperature 850 °C, duration 5 s |
| Driver included | Yes | Flammability mark | D [For mounting on easily flammable surfaces] |
| Optic type | WB [Wide beam] | CE mark | CE mark |
| Luminaire light beam spread | 42° x 44° | ENEC mark | ENEC mark |

GentleSpace Gen3

| | |
|---|-----------------------|
| Warranty period | 5 years |
| Constant light output | No |
| Number of products on MCB (16 A type B) | 12 |
| EU RoHS compliant | Yes |
| Product family code | BY480X [New Highbay] |
| Unified glare rating CEN | Not applicable |

Operating and Electrical

| | |
|---------------------|-------------|
| Input Voltage | 220-240 V |
| Input frequency | 50 to 60 Hz |
| Inrush current | 4.8 A |
| Inrush time | 2.3 ms |
| Power factor (min.) | 0.9 |

Controls and Dimming

| | |
|----------|-----|
| Dimmable | Yes |
|----------|-----|

Mechanical and Housing

| | |
|-------------------------------------|---|
| Housing material | Aluminium |
| Reflector material | - |
| Optic material | Polycarbonate |
| Optical cover/lens material | Glass |
| Fixation material | Steel |
| Optical cover/lens finish | Clear |
| Overall length | 460 mm |
| Overall width | 530 mm |
| Overall height | 115 mm |
| Colour | Silver RAL 9006 |
| Dimensions (height x width x depth) | 115 x 530 x 460 mm (4.5 x 20.9 x 18.1 in) |

Approval and Application

| | |
|------------------------------|---|
| Ingress protection code | IP65 [Dust penetration-protected, jet-proof] |
| Mech. impact protection code | IK02 [0.2 J standard] |

Initial Performance (IEC Compliant)

| | |
|-------------------------------------|----------|
| Initial luminous flux (system flux) | 13000 lm |
|-------------------------------------|----------|

| | |
|--------------------------------|----------------------|
| Luminous flux tolerance | +/-10% |
| Initial LED luminaire efficacy | 153 lm/W |
| Init. Corr. Colour Temperature | 4000 K |
| Init. Colour rendering index | >80 |
| Initial chromaticity | (0.38, 0.38) SDCM <3 |
| Initial input power | 84 W |
| Power consumption tolerance | +/-10% |

Over Time Performance (IEC Compliant)


| | |
|---|------|
| Control gear failure rate at median useful life 50,000 h | 5 % |
| Control gear failure rate at median useful life 100,000 h | 10 % |
| Lumen maintenance at median useful life* 50,000 h | L90 |
| Lumen maintenance at median useful life* 100,000 h | L80 |

Application Conditions


| | |
|------------------------------------|---------------|
| Ambient temperature range | -30 to +45 °C |
| Performance ambient temperature Tq | 45 °C |
| Maximum dimming level | 10% |
| Suitable for random switching | Yes |

Product Data

| | |
|-----------------------------------|--------------------------------------|
| Full product code | 871869940754400 |
| Order product name | BY480X LED130S/840 WB GC SI ACW-L BR |
| EAN/UPC – product | 8718699407544 |
| Order code | 40754400 |
| SAP numerator – quantity per pack | 1 |
| Numerator – packs per outer box | 1 |
| SAP material | 910500465560 |
| SAP net weight (piece) | 8.900 kg |





Dimensional drawing

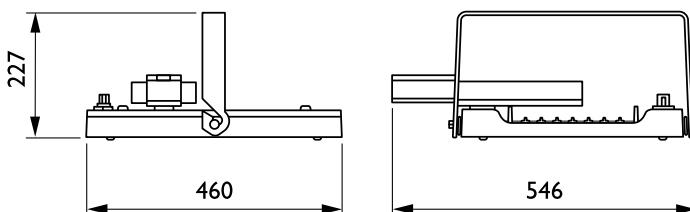

GentleSpace gen3 BY480P-BY483P

Photometric data

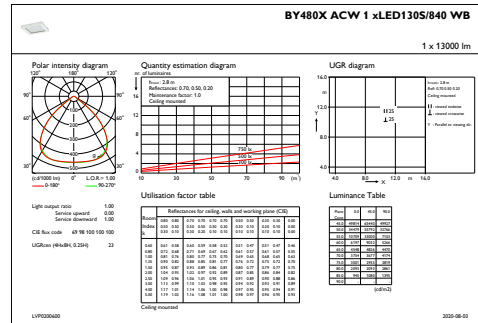

OFPC1_BY480XACW1xLED130S840WB

IFGU1_BY480XACW1xLED130S840WB

