


**PHILIPS**

Lighting

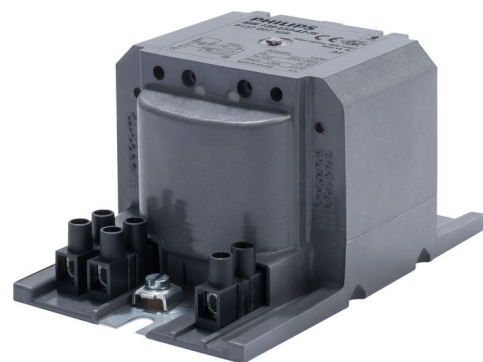

# HID-HeavyDuty BSN semi-parallel for SON/CDO/MH/HPI

## BSN 150 L33-A2-TS 230V 50Hz

Encapsulated electromagnetic copper/iron ballasts for use with an external semi-parallel ignitor for CDM, CDO, MH, HPI (Plus) and SON lamps

### Product data

General Information	
Remarks	UK importer address: Signify Commercial UK Limited, 3, Guildford Business Park, GU2 8XG
Application code	L33-A2-TS
Design	HD2-126
Lamp type	SON/MH
Number of lamps	1 piece/unit
Operating and Electrical	
Input Voltage	230 V
Input frequency	50 Hz
Power factor 100% load (nom.)	0.85
Mains voltage performance (AC)	-8%+6%
Mains voltage safety (AC)	-10%+10%
Input current with PF correction	0.85 A
Input current without PF Correction	1.8 A
Power factor without PF compensation (nom.)	0.4
Power losses (nom.)	17 W
Wiring	
Wire strip length	6.0 mm
Ballast contact wire cross section	2.5 mm <sup>2</sup>
Connector type	Screw
System characteristics	
Capacitor	18µF/250V
Rated ballast-lamp power	150 W
Recommended ignitor	for SON lamps ignitor SND 58 (913700185166) or series digital SUD40 (913700193591)
Temperature	
T storage (max.)	130 °C
T storage (min.)	-30 °C
T-winding (max.)	130 °C
Delta-T normal conditions	60 °C

# HID-HeavyDuty BSN semi-parallel for SON/CDO/MH/HPI

## Approval and Application


Active temperature protection	Yes
Approval marks	CE marking ENEC certificate

## Product Data

Full product code	871869674100900
Order product name	BSN 150 L33-A2-TS 230V 50Hz
EAN/UPC – product	8718696741009

Order code	74100900
SAP numerator – quantity per pack	1
Numerator – packs per outer box	6
SAP material	913700752826
SAP net weight (piece)	1.910 kg

## Dimensional drawing

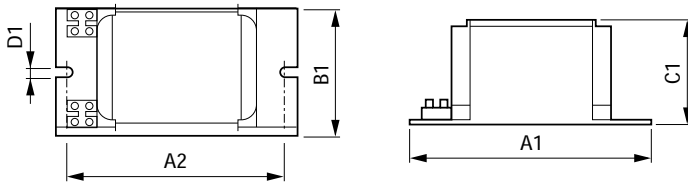

Product	A1	A2	B1	C1	D1
BSN 150 L33-A2-TS 230V 50Hz	126 mm	108 mm	81 mm	66 mm	6.2 mm

BSN 150 L33-A2-TS 230V 50Hz

