



# **MASTER PL-C 2 Pin**



## MASTER PL-C 13W/830/2P 1CT/5X10BOX

Energy-saving compact fluorescent lampsCompact long-arc low-pressure mercury discharge lampEnvelope consists of 4 parallel narrow fluorescent tubes

#### **Warnings and Safety**

- $\cdot$  Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- · Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

| General Information              |                       |
|----------------------------------|-----------------------|
| Cap base                         | G24D-1 [ G24d-1]      |
| Life to 10% failures (nom.)      | 6500 h                |
| Life to 50% failures (nom.)      | 10000 h               |
| LSF 2000 h Rated                 | 99 %                  |
| LSF 4000 h Rated                 | 98 %                  |
| LSF 6000 h Rated                 | 92 %                  |
| LSF 8000 h Rated                 | 78 %                  |
|                                  | Sphere                |
|                                  |                       |
| Light Technical                  |                       |
| Colour Code                      | 830 [ CCT of 3,000 K] |
| Luminous flux (nom.)             | 925 lm                |
| Luminous flux (rated) (nom.)     | 925 lm                |
| Colour designation               | Warm white (WW)       |
| Chromaticity coordinate X (nom.) | 0.44                  |
|                                  |                       |

| Chromaticity coordinate Y (nom.)    | 0.403   |
|-------------------------------------|---------|
| Correlated Colour Temperature (Nom) | 3000 K  |
| Luminous efficacy (rated) (nom.)    | 69 lm/W |
| Colour rendering index (nom.)       | 82      |
| LLMF 2000 h Rated                   | 92 %    |
| LLMF 4000 h Rated                   | 87 %    |
| LLMF 6000 h Rated                   | 83 %    |
| LLMF 8000 h Rated                   | 81 %    |
|                                     |         |
| Operating and Electrical            |         |
| Power (Rated) (Nom)                 | 13.8 W  |
| Lamp current (nom.)                 | 0.170 A |
|                                     |         |
| Temperature                         |         |
| Design temperature (nom.)           | 28 °C   |
|                                     |         |


Datasheet, 2021, September 2 data subject to change

## **MASTER PL-C 2 Pin**

| Controls and Dimming               |        |
|------------------------------------|--------|
| Dimmable                           | No     |
|                                    |        |
| Mechanical and Housing             |        |
| Cap-base information               | 2P     |
|                                    |        |
| Approval and Application           |        |
| Energy Efficiency Class            | G      |
| Mercury (Hg) content (max.)        | 1.4 mg |
| Mercury (Hg) content (nom.)        | 1.4 mg |
| Energy consumption kWh/1,000 hours | 14 kWh |
|                                    | 423279 |
|                                    | ·      |

| Product Data                      |                                    |
|-----------------------------------|------------------------------------|
| Full product code                 | 871150062084270                    |
| Order product name                | MASTER PL-C 13W/830/2P 1CT/5X10BOX |
| EAN/UPC – product                 | 8711500620842                      |
| Order code                        | 62084270                           |
| Local order code                  | 13PLC8302PIN                       |
| SAP numerator – quantity per pack | 1                                  |
| Numerator – packs per outer box   | 50                                 |
| SAP material                      | 927904883040                       |
| SAP net weight (piece)            | 53.600 g                           |
| ILCOS code                        | FSQ-13/30/1B-I-G24d=1              |
|                                   |                                    |


## Dimensional drawing




PL-C 13W/830/2P



#### Photometric data

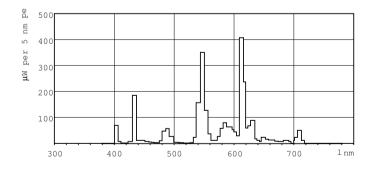


Lightcolour /830

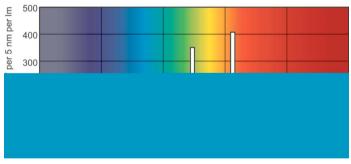

Lightcolour /830

## **MASTER PL-C 2 Pin**


#### Lifetime

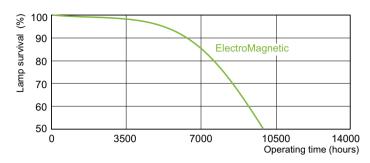



#### LDLE\_PLC2P\_0001-Life expectancy diagram



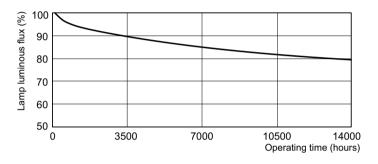

LDLM\_PLC2P\_0001-Lumen maintenance diagram



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.