



Actinic BL TL(-K)/TL-D(-K)

Actinic BL TL 8W/10 1FM/10X25CC

Tubular low-pressure mercury vapour fluorescent lamps

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product data

General Information		Voltage (Nom)	
Cap base	G5 [G5]	56 V	
Main application	Insect traps	Mechanical and Housing	
Life to 50% failures (nom.)	10000 h	Bulb shape	T16
Useful life (nom.)	5000 h	Approval and Application	
Light Technical		Mercury (Hg) content (nom.)	4.4 mg
Colour Code	10	UV	
Colour designation	Actinic	UV-B/UV-A (IEC)	0.2 %
Chromaticity coordinate X (nom.)	222	UV-A radiation 100 hours (IEC)	1.60 W
Chromaticity coordinate Y (nom.)	210	Product Data	
Depreciation at 500 Hours	17 %	Full product code	871150026042027
UV depreciation at 1,000 h	25 %	Order product name	Actinic BL TL 8W/10 1FM/10X25CC
UV Depreciation at 2,000 h	35 %	EAN/UPC – product	8711500260420
Operating and Electrical		Order code	26042027
Power (Rated) (Nom)	7.1 W	Local order code	810
Lamp current (nom.)	0.145 A	SAP numerator – quantity per pack	1

Actinic BL TL(-K)/TL-D(-K)

Numerator – packs per outer box	250
SAP material	928001001030
SAP net weight (piece)	25.300 g



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL 8W/10 1FM/10X25CC	16 mm	288.3 mm	295.4 mm	293 mm	302.5 mm

TL 8W/10

Photometric data

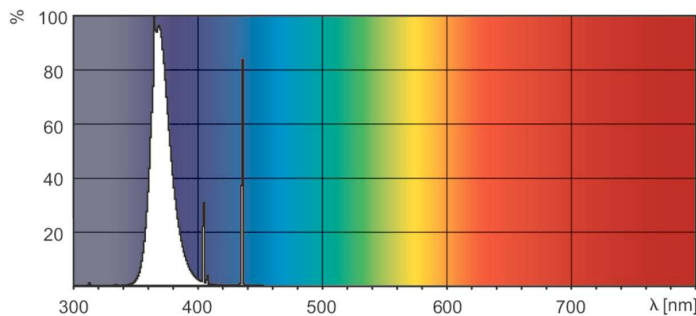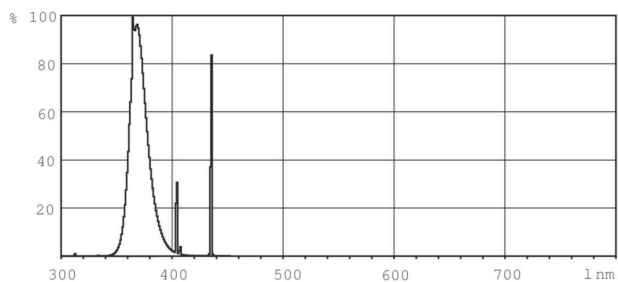

Lightcolour /10

Lightcolour /10

