



MASTERColour CDM-T

MASTERColour CDM-T 35W/842 G12 1CT/12

Range of single-ended, compact, high-efficiency, discharge lamps with a stable colour over lifetime and a crisp, sparkling light

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Lamps may use electronic or electromagnetic control gear, except 35W/942 and 20W lamps, which must use electronic control gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information		Luminous flux (rated) (nom.)	
Cap base	G12 [G12]		3000 lm
Operating position	UNIVERSAL [Any/Universal]	Colour designation	Cool White (CW)
Life to 5% failures (nom.)	9000 h	Lumen maintenance 10,000 hours (nom.)	70 %
Life to 10% failures (nom.)	10000 h	Lumen maintenance 2,000 hours (min.)	80 %
Life to 20% failures (nom.)	11000 h	Lumen maintenance 2,000 hours (nom.)	90 %
Life to 50% failures (nom.)	12000 h	Lumen maintenance 5,000 hours (min.)	75 %
ANSI code HID	-	Lumen maintenance 5,000 hours (nom.)	85 %
	Sphere	Chromaticity coordinate X (nom.)	0.371
		Chromaticity coordinate Y (nom.)	0.366
		Correlated Colour Temperature (Nom)	4200 K
		Luminous efficacy (rated) (nom.)	77 lm/W
		Colour rendering index (nom.)	84
Light technical			
Colour Code	842 [CCT of 4,200 K]		
Luminous flux (nom.)	3000 lm		

MASTERColour CDM-T

Operating and electrical

Power (Rated) (Nom)	39.1 W
Lamp current run-up (max.)	0.720 A
Ignition supply voltage (max.)	198 V
Ignition peak voltage (max.)	5000 V
Ignition supply voltage (min.)	198 V
Ignition peak voltage (min.)	3500 V
Re-ignition time (min.) (max.)	15 min
Ignition time (max.)	30 s
Voltage (Max)	93 V
Voltage (Min)	77 V
Voltage (Nom)	85 V

Controls and dimming

Dimmable	No
Run-up time 90% (max.)	3 min

Mechanical and housing

Lamp Finish	Clear
Bulb shape	T19 [T 19mm]

Approval and application

Energy Efficiency Class	G
Mercury (Hg) content (max.)	2.7 mg
Mercury (Hg) content (nom.)	2.7 mg

Energy consumption kWh/1,000 hours	40 kWh
	473355

UV

PET (NIOSH) (min.)	8 h/500lx
Damage factor D/fc (max.)	0.5


Luminaire design requirements

Bulb temperature (max.)	500 °C
Cap-base temperature (max.)	280 °C
Pinch temperature (max.)	350 °C

Product data

Full product code	871150021126215
Order product name	MASTERColour CDM-T 35W/842 G12 1CT/12
EAN/UPC – product	8711500211262
Order code	21126215
Local order code	35CDMT842
SAP numerator – quantity per pack	1
Numerator – packs per outer box	12
SAP material	928094305125
Copy Net Weight (Piece)	28.000 g
ILCOS code	MT/UB-35/842-H-G12-20/90

Dimensional drawing




MASTERColour CDM-T 35W/842 G12 1CT/12



Product	D (max)	D	O	L (min)	L (max)	L	C (max)
MASTERColour CDM-T	20 mm	0.75 in	5 mm	55 mm	57 mm	56	103 mm
35W/842 G12 1CT/12							mm

MASTERCoulour CDM-T

Photometric data

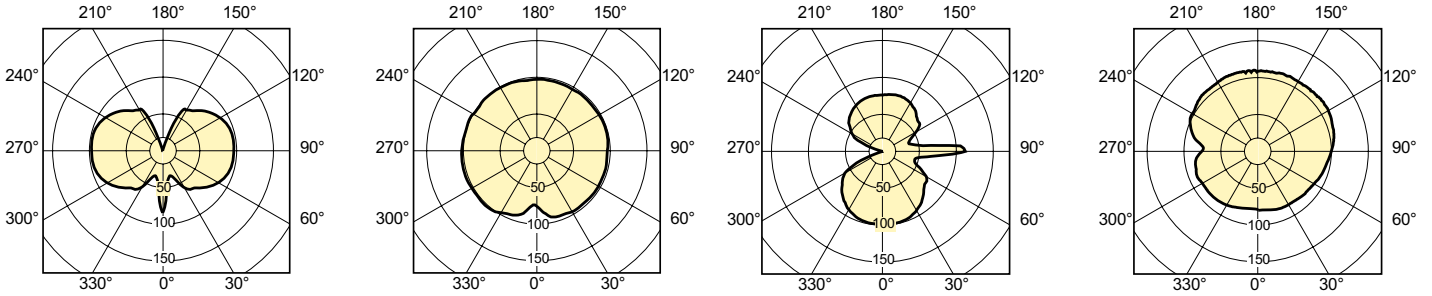


LDLD_CDM-T_0001-Light distribution diagram LDLD_CDM-T_0002-Light distribution diagram

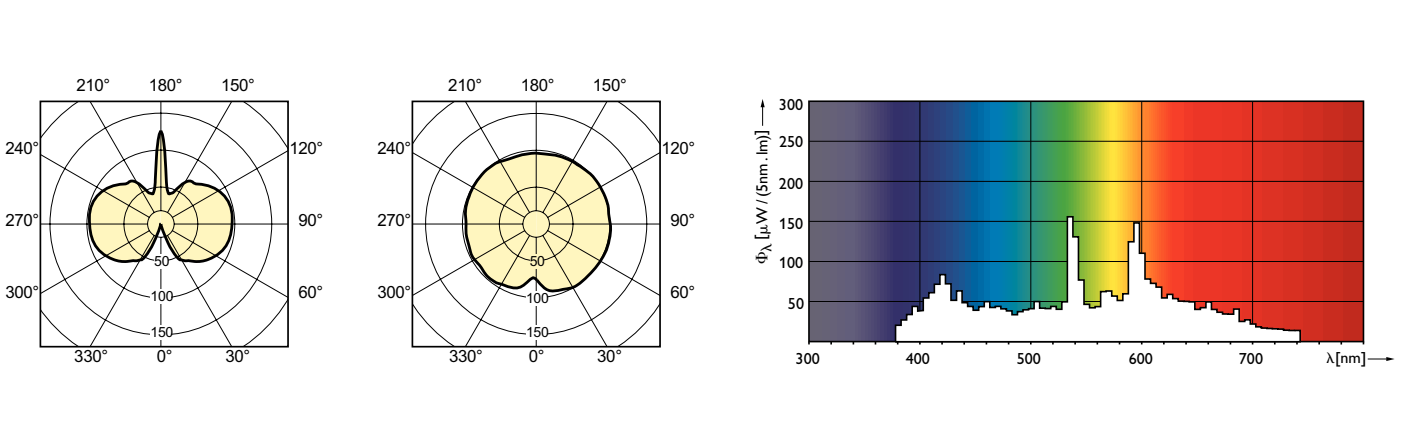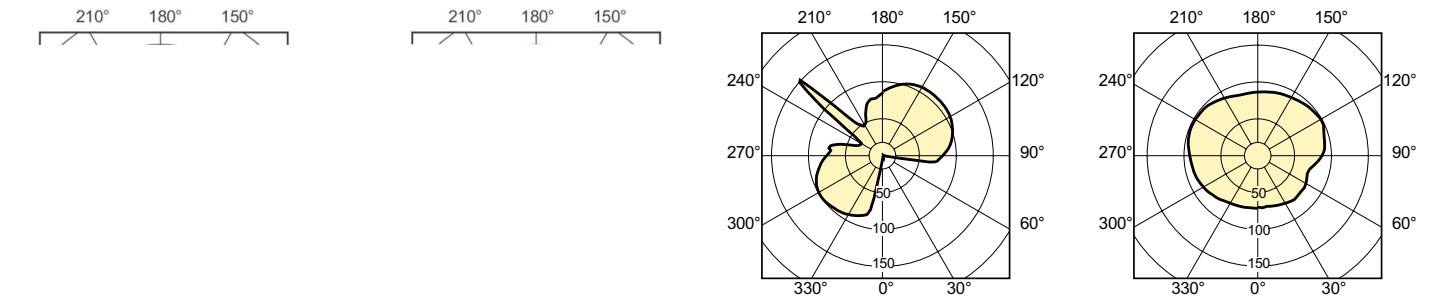

LDLD_CDM-T_0005-Light distribution diagram LDPO_CDM-T_35W_842-Spectral power distribution Colour

MASTERCcolour CDM-T

Lifetime

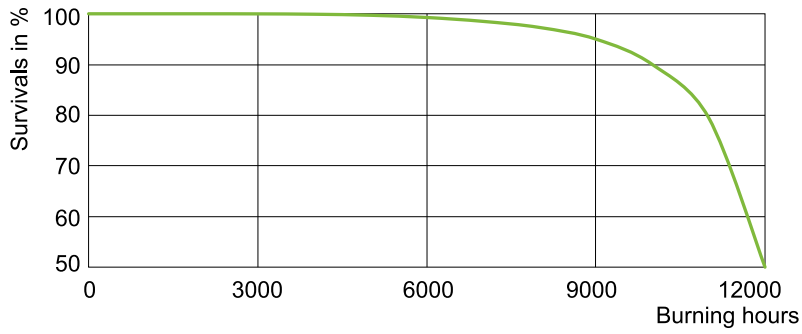

LDLE_CDM-T_0001-Life expectancy diagram

