



CorePro LEDcandle

CorePro lustre ND 4-25W E27 827 P45 FR

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.

Product data

General Information		Warm-up time to 60% light (nom.)	
Cap base	E27 [E27]		0.5 s
EU RoHS compliant	Yes	Power factor (nom.)	0.4
Nominal lifetime (nom.)	15000 h	Voltage (Nom)	220-240 V
Switching cycle	50,000X	Temperature	
Technical type	4-25W	T-Case maximum (nom.)	75 °C
Light Technical		Controls and Dimming	
Colour Code	827 [CCT of 2,700 K]	Dimmable	No
Luminous flux (nom.)	250 lm	Mechanical and Housing	
Colour designation	Warm white (WW)	Lamp Finish	Frosted
Correlated Colour Temperature (Nom)	2700 K	Bulb shape	P45 [P 45mm]
Luminous efficacy (rated) (nom.)	62.50 lm/W	Approval and Application	
Colour consistency	<6	Energy consumption kWh/1,000 hours	4 kWh
Colour rendering index (nom.)	80	Product Data	
LLMF at end of nominal lifetime (nom.)	70 %	Full product code	871829178705100
Operating and Electrical		Order product name	CorePro lustre ND 4-25W E27 827 P45 FR
Input frequency	50 to 60 Hz	EAN/UPC – product	8718291787051
Power (Rated) (Nom)	4 W	Order code	78705100
Lamp current (nom.)	35 mA	Local order code	CPL4E27827FR
Wattage equivalent	25 W		
Starting time (nom.)	0.5 s		

CorePro LEDcandle

SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
SAP material	929001157602

SAP net weight (piece)	0.040 kg
------------------------	----------



Dimensional drawing

D


Product	D	C
CorePro lustre ND 4-25W E27 827 P45 FR	45 mm	87 mm

LED ND 4-25W E27 827 220-240V P45 FR

Photometric data

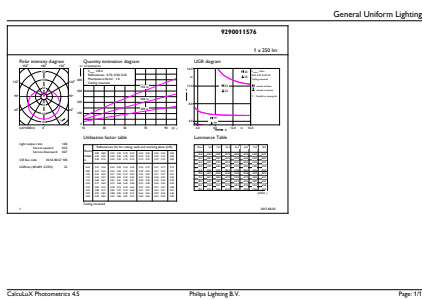

CorePro LEDlustre 4-25W E27 827 FR P45

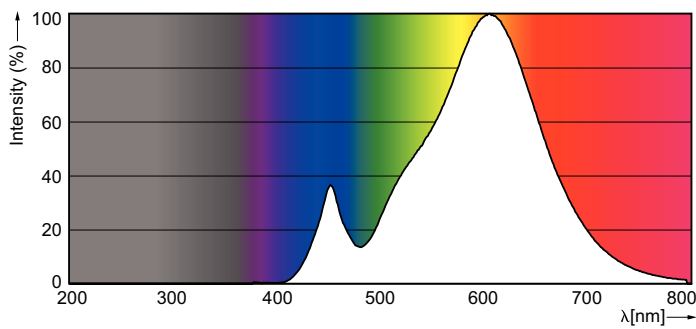

SDPO_LEDLSR_0003-Spectral Power distribution


CorePro LEDlustre 4-25W E14 827 FR P45

CorePro LEDcandle

Lifetime



LEDbulb 60W E14 827 FR B38

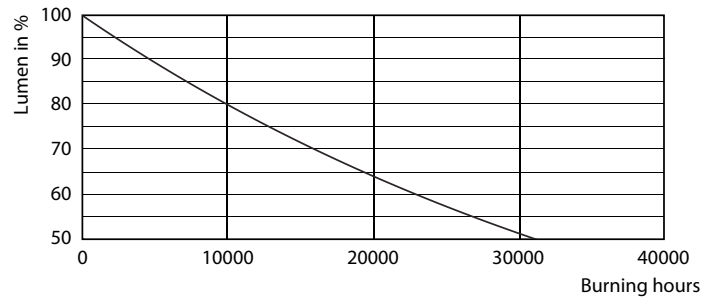

LEDbulb 60W E14 827 FR B38

