



# TubeLine

## BGP360 LED30/740 DTS CFW C250WM GP

TubeLine 2M - LED module 3000 lm - Distribution tunnel symmetrical - Safety class I - Cord with plug Wieland/Adels compatible 3-pole

Fluorescent linear lighting has traditionally been the preferred choice for customers demanding a high level of visual comfort. With excellent lighting uniformity on the road and walls, perfect visual guidance and high colour recognition, linear lighting offers the driver superior lighting quality and safety as well as high system redundancy compared to point-source lighting solutions. With TubeLine, the same lighting quality can be achieved but with the advantages of LED technology. TubeLine is a state-of-the-art LED tunnel luminaire which offers all the benefits of linear lighting. With the latest LED technology, optimised dimensions and attractive pricing, linear lighting has never been more achievable within the constraints of limited budgets.

### Product data

General Information			
Number of light sources	24 [ 24 pcs]	Cable	Cord with plug Wieland/Adels compatible 3-pole
Lamp family code	LED30 [ LED module 3000 lm]	Protection class IEC	Safety class I
Light source colour	740 neutral white	Flammability mark	NO [ - ]
Light source replaceable	No	CE mark	CE mark
Number of gear units	1 unit	ENEC mark	ENEC mark
Gear	-	UL mark	No
Driver/power unit/transformer	No [ - ]	Warranty period	3 years
Driver included	No	Optic type outdoor	Distribution tunnel symmetrical
Optical cover/lens type	FG [ Flat glass]	Gland material	Cable gland plastic
Luminaire light beam spread	150°	Remarks	*- According to the Lighting Europe guidance paper 'Evaluating performance of
Connection	Flying leads/cables		

# TubeLine

	LED based luminaires – January 2018': statistically there is no relevant difference in lumen maintenance between the B50 and, for example, the B10. Therefore, the median useful life (B50) value also represents the B10 value. * At extreme ambient temperatures the luminaire might automatically dim down to protect components
Constant light output	No
Spare parts available	No
Number of products on MCB (16 A type B)	26
Photobiological risk	Photobiological risk group 1 @ 200mm to EN62471
EU RoHS compliant	Yes
WEEE mark	WEEE mark
Light source engine type	LED
Product family code	BGP360 [ TubeLine 2M]

## Light Technical

Upward light output ratio	0
Initial luminous flux at 35 °C	3000 lm
Standard tilt angle post-top	-
Standard tilt angle side entry	-

## Operating and Electrical

Input Voltage	- V
Input frequency	0 Hz
Inrush current	0 A
Inrush time	0 ms
Driver current	310 mA
Power factor (min.)	0.96

## Controls and Dimming

Dimmable	No
----------	----

## Mechanical and Housing

Housing material	Aluminium
Reflector material	Polycarbonate
Optic material	Polymethyl methacrylate
Optical cover/lens material	Glass
Fixation material	Aluminium
Mounting device	No [ - ]
Optical cover/lens shape	Flat
Optical cover/lens finish	Clear

Overall length	1998 mm
Overall width	109 mm
Overall height	47 mm
Effective projected area	0.15728 m²
Colour	Aluminium
Dimensions (height x width x depth)	47 x 109 x 1998 mm (1.9 x 4.3 x 78.7 in)

## Approval and Application

Ingress protection code	IP66 [ Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [ 5 J vandal-protected]
Surge protection (common/differential)	-

## Initial Performance (IEC Compliant)

Initial luminous flux	2700 lm
Luminous flux tolerance	+/-7%
Initial LED luminaire efficacy	141 lm/W
Init. Corr. Colour Temperature	4000 K
Init. colour rendering index	≥80
Initial chromaticity	(0.433, 0.403) SDCM <3
Initial input power	19.2 W
Power consumption tolerance	+/-11%

## Over Time Performance (IEC Compliant)


Control gear failure rate at median useful life 100,000 h	10 %
Lumen maintenance at median useful life* 100,000 h	L98

## Application Conditions

Ambient temperature range	-40 to +50 °C
Performance ambient temperature Tq	25 °C


## Product Data

Full product code	871869909429400
Order product name	BGP360 LED30/740 DTS CFW C250WM GP
EAN/UPC – product	8718699094294
Order code	09429400
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
Material no. (12 NC)	912300023650
Net Weight (Piece)	6.000 kg



## TubeLine

### Dimensional drawing

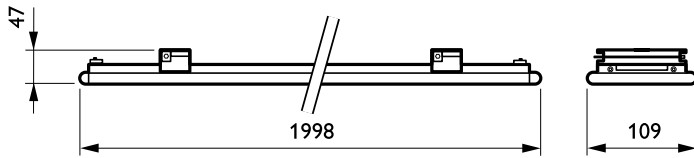

TubeLine BGP360

