



MASTER PL-C Xtra 4 Pin

MASTER PL-C Xtra 26W/840/4P 1CT/5X10CC

Energy-saving compact fluorescent lamps Compact long-arc low-pressure mercury discharge lamp Envelope consists of 4 parallel narrow fluorescent tubes

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	G24Q-3 [G24q-3]
Life to 50% failures preheat (nom.)	33000 h
LSF preheat 2,000 hours rated	99 %
LSF preheat 4,000 hours rated	98 %
LSF preheat 6,000 hours rated	97 %
LSF preheat 8,000 hours rated	96 %
LSF preheat 16,000 hours rated	94 %
LSF preheat 20,000 hours rated	90 %
Light Technical	
Colour Code	840 [CCT of 4,000 K]
Luminous flux (nom.)	1800 lm
Luminous flux (rated) (nom.)	1800 lm
Colour designation	Cool White (CW)

Correlated Colour Temperature (Nom)	4000 K
Luminous efficacy (rated) (nom.)	75 lm/W
Colour rendering index (nom.)	82
LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	88 %
LLMF 6000 h Rated	86 %
LLMF 8000 h Rated	84 %
LLMF 12000 h Rated	81 %
LLMF 16000 h Rated	79 %
LLMF 20000 h Rated	78 %
Operating and Electrical	
Power (Rated) (Nom)	26.0 W
Lamp current (nom.)	0.300 A

MASTER PL-C Xtra 4 Pin

Temperature

Design temperature (nom.)	28 °C
---------------------------	-------

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Cap-base information	4P
----------------------	----


Approval and Application

Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	3.0 mg
Energy consumption kWh/1,000 hours	29 kWh

Product Data

Full product code	871150089892070
Order product name	MASTER PL-C Xtra 26W/840/4P 1CT/5X10BOX
EAN/UPC – product	8711500898920
Order code	89892070
Local code	26PLC8404PXTRA
SAP numerator – quantity per pack	1
Numerator – packs per outer box	50
Material no. (12 NC)	927906384014
SAP net weight (piece)	60.400 g
ILCOS code	FSQ-26/40/1B-E-G24q=3


Dimensional drawing



PL-C Xtra 26W/840/4P

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C Xtra 26W/ 840/4P 1CT/5X10BOX	27.1 mm	27.1 mm	130.7 mm	149.0 mm	163.9 mm

Photometric data


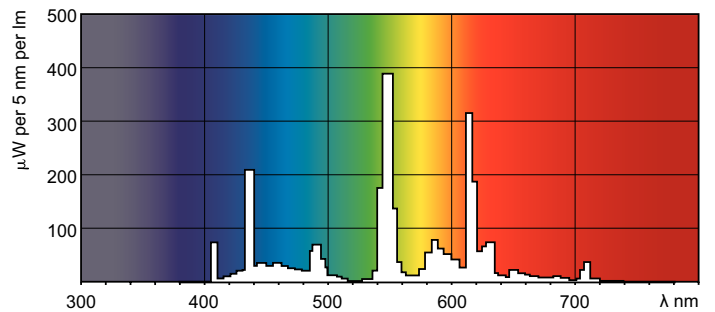


Lightcolour /840

Lightcolour /840



MASTER PL-C Xtra 4 Pin

Lifetime

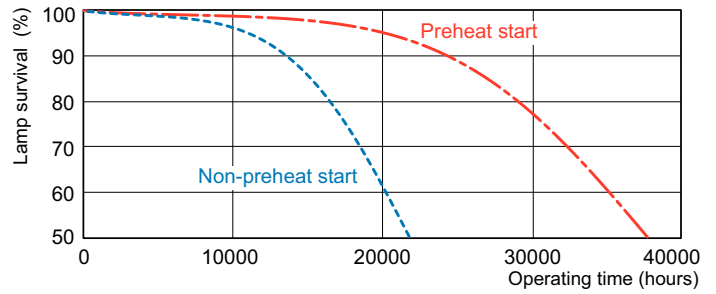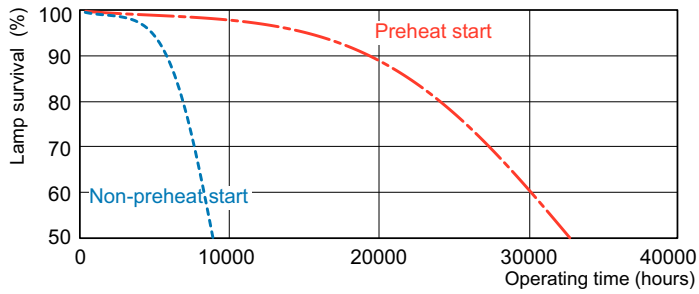

LDLE_PLC4PLTG_0001-Life expectancy diagram

LDLE_PLC4PLTG_0002-Life expectancy diagram

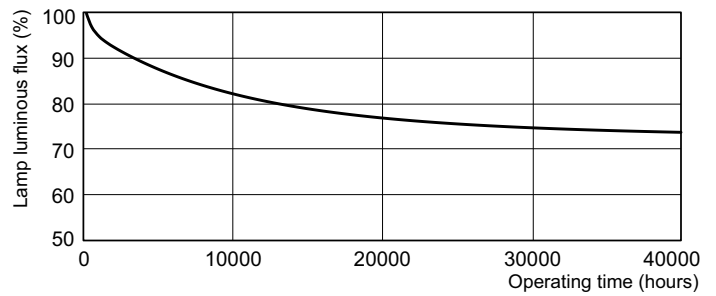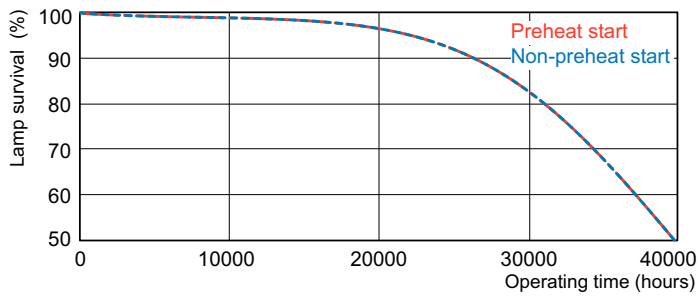

LDLE_PLC4PLTG_0003-Life expectancy diagram

LDLM_PLC4PLTG_0001-Lumen maintenance diagram

