



MASTER PL-L Xtra Polar 4 Pin

MASTER PL-L XTRA POLAR 55W/830/4P 1CT/25

MASTER PL-L Xtra Polar is a medium to high-wattage linear compact fluorescent lamp, typically used for lower-temperature applications such as outdoor lighting and cold storage. MASTER PL-L Xtra Polar lamps furthermore provide significantly lower operating costs thanks to their lifetime, which is more than double that of a standard MASTER PL-L lamp, and their very low early failure rate. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. It is designed for operation on electromagnetic as well as HF electronic gear and is provided with a plug-in/pull-out lamp base.

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	2G11 [2G11]
Life to 50% failures preheat (nom.)	36000 h
System description	High Frequency [High Frequency (HF)]
LSF preheat 2,000 hours rated	99 %
LSF preheat 4,000 hours rated	99 %
LSF preheat 6,000 hours rated	99 %
LSF preheat 8,000 hours rated	99 %

LSF preheat 16,000 hours rated	97 %
LSF preheat 20,000 hours rated	94 %
Light Technical	
Colour Code	830 [CCT of 3,000 K]
Luminous flux (nom.)	4800 lm
Luminous flux (rated) (nom.)	4800 lm
Colour designation	Warm white (WW)

MASTER PL-L Xtra Polar 4 Pin

Correlated Colour Temperature (Nom)	3000 K
Luminous efficacy (rated) (nom.)	87 lm/W
Colour rendering index (nom.)	>80
LLMF 2000 h Rated	95 %
LLMF 4000 h Rated	94 %
LLMF 6000 h Rated	93 %
LLMF 8000 h Rated	92 %
LLMF 12000 h Rated	91 %
LLMF 16000 h Rated	90 %
LLMF 20000 h Rated	90 %

Operating and Electrical

Power (Rated) (Nom)	55.0 W
Lamp current (nom.)	0.550 A

Temperature

Design temperature (nom.)	18 °C
---------------------------	-------

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Cap-base information	4P
----------------------	----

Approval and Application

Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	3.0 mg
Energy consumption kWh/1,000 hours	61 kWh

Product Data

Full product code	871150026784940
Order product name	MASTER PL-L XTRA POLAR 55W/830/4P 1CT/25
EAN/UPC – product	8711500267849
Order code	26784940
Local code	55PLL830XTRAPOL
SAP numerator – quantity per pack	1
Numerator – packs per outer box	25
Material no. (12 NC)	927908983015
SAP net weight (piece)	134.000 g
ILCOS code	FSDH-55/30/1B-L/P-2G11



Dimensional drawing

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-L XTRA POLAR 55W/830/4P 1CT/25	39.0 mm	18.0 mm	509.2 mm	535 mm	541.6 mm

PL-L Xtra 55W/830/4P LT

MASTER PL-L Xtra Polar 4 Pin

Photometric data

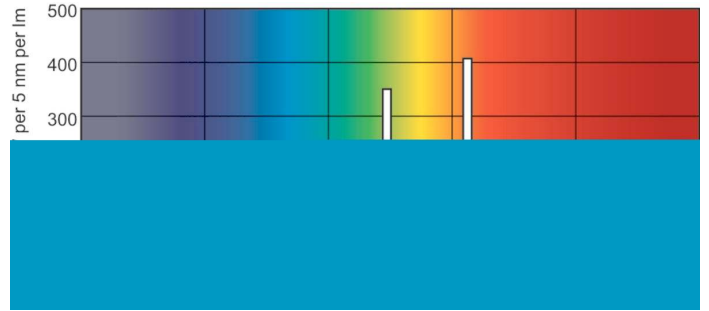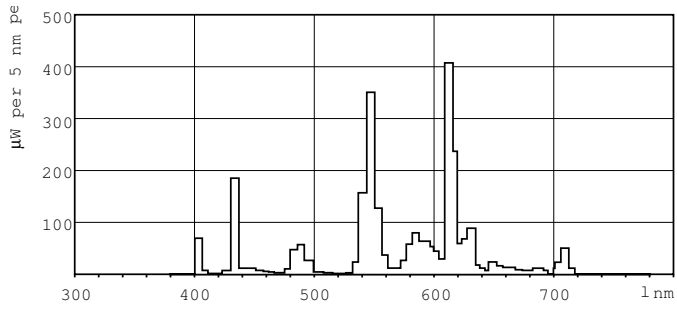

Lightcolour /830

Lightcolour /830

