



# Actinic BL TL(-K)/TL-D(-K)

## Actinic BL TL 8W/10 1FM/10X25CC

Tubular low-pressure mercury vapour fluorescent lamps

### Warnings and Safety


- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information		Voltage (Nom)	
Cap base	G5 [ G5]	56 V	
Main application	Insect traps	Approval and Application	
Life to 50% failures (nom.)	10000 h	Mercury (Hg) content (nom.)	4.4 mg
Useful life (nom.)	5000 h	UV	
Light Technical		UV-B/UV-A (IEC)	0.2 %
Colour Code	10	UV-A radiation 100 hours (IEC)	1.60 W
Colour designation	Actinic	Product Data	
Chromaticity coordinate X (nom.)	222	Full product code	871150026042027
Chromaticity coordinate Y (nom.)	210	Order product name	Actinic BL TL 8W/10 1FM/10X25CC
Depreciation at 500 Hours	17 %	EAN/UPC – product	8711500260420
Depreciation at 1000 Hours	25 %	Order code	26042027
Depreciation at 500 Hours	35 %	Local code	810
Operating and Electrical		SAP numerator – quantity per pack	1
Power (Rated) (Nom)	7.1 W	Numerator – packs per outer box	250
Lamp current (nom.)	0.145 A	Material no. (12 NC)	928001001030
		SAP net weight (piece)	25.300 g

# Actinic BL TL(-K)/TL-D(-K)


## Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL 8W/10 1FM/ 10X25CC	16 mm	288.3 mm	295.4 mm	293 mm	302.5 mm

TL 8W/10

## Photometric data

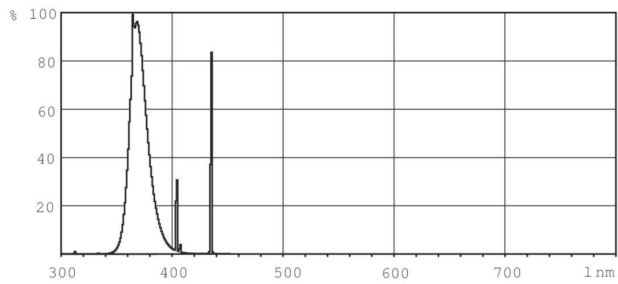

Lightcolour /10

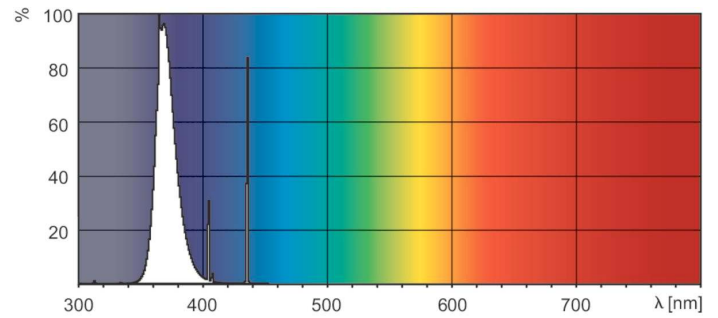

Lightcolour /10

