



Actinic BL TL(-K)/TL-D(-K)

Actinic BL TL-D 15W/10 1SL/25

Tubular low-pressure mercury vapour fluorescent lamps

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	G13 [Medium Bi-Pin Fluorescent]
Main application	Insect traps
Life to 50% failures (nom.)	8000 h
Useful life (nom.)	9000 h

Light Technical	
Colour Code	10
Colour designation	Actinic
Chromaticity coordinate X (nom.)	222
Chromaticity coordinate Y (nom.)	210
UV Depreciation at 2,000 h	10 %
UV depreciation at 5000 hours	15 %
Depreciation at 500 Hours	20 %

Operating and Electrical	
Power (Rated) (Nom)	15 W
Lamp current (nom.)	0.34 A

Voltage (Nom)	
Voltage (Nom)	55 V

Mechanical and Housing	
Bulb shape	T26 [T 26mm]

Approval and Application	
Mercury (Hg) content (nom.)	5.0 mg


UV	
UV-B/UV-A (IEC)	0.2 %
UV-A radiation 100 hours (IEC)	3.9 W

Product Data	
Full product code	871150071093240
Order product name	Actinic BL TL-D 15W/10 1SL/25
EAN/UPC – product	8711500710932
Order code	71093240
Local order code	TLD1510
SAP numerator – quantity per pack	1

Actinic BL TL(-K)/TL-D(-K)

Numerator – packs per outer box	25
SAP material	928024801029
SAP net weight (piece)	56.570 g


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-D 15W/10 1SL/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

TL-D 15W/10

Photometric data

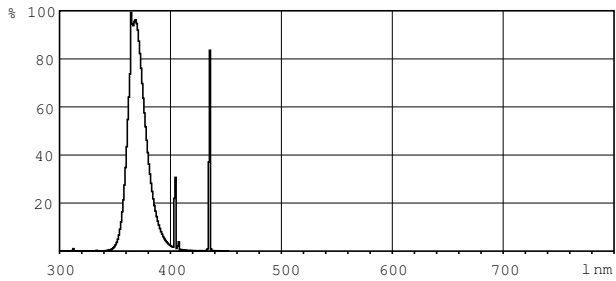

Lightcolour /10

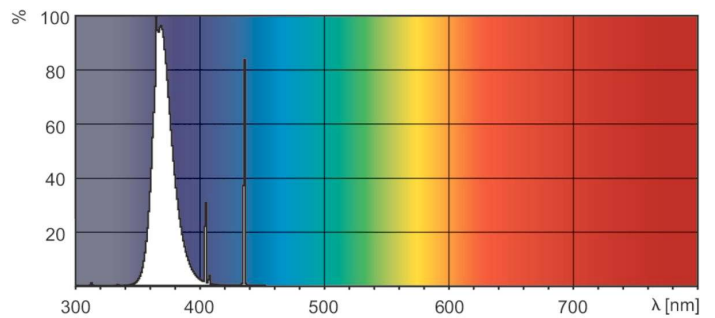

Lightcolour /10

