



# TownGuide Performer

## BDP104 LED70/740 DRW PCC GR D9 62P

TOWNGUIDE PERF T - LED module 7000 lm - Distribution residential wide - Polycarbonate bowl/cover clear - Post-top for diameter 62 mm

The TownGuide Performer family consists of six recognizable yet modern shapes: Flat Cone, Bowl, Classic Cone, Classic, T and Tzero. All are available with a clear bowl. Except for Tzero, also a frosted bowl can be chosen. With an extensive range of lumen packages and a choice of light colors and operating lifetimes, it is easy to select the version that best suits your project's specific requirements. In addition, TownGuide Performer has a variety of control system options that can make it an integral part of your smart energy-reduction programs – from stand-alone LumiStep and DynaDimmer, SDU switch-dim control, through to seamless remote connectivity with CityTouch lighting management software. Installation is easy. Thanks to the bayonet whistle connector with integrated gland located in the spigot, the luminaire does not have to be opened at all for installation. Philips has made every effort to make the Total Cost of Ownership (TCO) of the luminaire as attractive as possible. And as TownGuide Performer is a dedicated LED luminaire, compatible with a variety of control systems, the energy and maintenance cost savings compared to conventional lighting are significant.

### Product data

General Information			
Number of light sources	8 [ 8 pcs]	Driver included	Yes
Lamp family code	LED70 [ LED module 7000 lm]	Optical cover/lens type	PCC [ Polycarbonate bowl/cover clear]
Light source colour	740 neutral white	Luminaire light beam spread	39° x 96°
Light source replaceable	Yes	Embedded control	No [ -]
Number of gear units	1 unit	Control interface	DALI
Driver/power unit/transformer	PSD [ Power supply unit with DALI interface]	Light regulation	Dimming via external communication DALI
		Connection	Screw connection block 5-pole

# TownGuide Performer

Cable	-
Protection class IEC	Safety class I
Parts colour	All parts colored
Coating	-
Glow-wire test	Temperature 650 °C, duration 5 s
Flammability mark	NO [-]
Safety device	PCBC [ PCB cover]
CE mark	CE mark
ENEC mark	ENEC mark
Warranty period	5 years
Optic type outdoor	Distribution residential wide
Photocell	No [-]
Constant light output	No
Number of products on MCB (16 A type B)	10
EU RoHS compliant	Yes
WEEE mark	-
LED engine type	LED
Serviceability class	Class A, the luminaire is equipped with serviceable parts (when applicable): LED board, driver, control units, surge-protection device, optics, front cover and mechanical parts
Product family code	BDP104 [ TOWNGUIDE PERF T]

## Light Technical

Upward light output ratio	3
Standard tilt angle post-top	0°
Standard tilt angle side entry	-

## Operating and Electrical

Input Voltage	220-240 V
Input frequency	50 to 60 Hz
Inrush current	45 A
Inrush time	0.285 ms
Power factor (min.)	0.96
Power factor (nom.)	0.91

## Controls and Dimming

Dimmable	Yes
----------	-----

## Mechanical and Housing

Housing material	Aluminium
Reflector material	-
Optic material	Acrylate
Optical cover/lens material	Polycarbonate
Fixation material	Steel
Mounting device	62P [ Post-top for diameter 62 mm]
Optical cover/lens shape	Narrow

Optical cover/lens finish	Clear
Torque	15
Overall height	277 mm
Overall diameter	570 mm
Effective projected area	0.053 m²
Colour	Grey
Dimensions (height x width x depth)	277 x NaN x NaN mm (10.9 x NaN x NaN in)

## Approval and Application

Ingress protection code	IP66 [ Dust penetration-protected, jet-proof]
Mech. impact protection code	IK10 [ 20 J vandal-resistant]
Surge protection (common/differential)	Luminaire surge protection level up to 6 kV differential mode and 6 kV common mode

## Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	4620 lm
Luminous flux tolerance	+/-7%
Initial LED luminaire efficacy	102 lm/W
Init. Corr. Colour Temperature	4000 K
Init. Colour rendering index	70
Initial chromaticity	(0.38, 0.38) SDCM <5
Initial input power	45.5 W
Power consumption tolerance	+/-11%

## Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 100,000 h	10 %
Lumen maintenance at median useful life* 100,000 h	93

## Application Conditions

Ambient temperature range	-40 to +35 °C
Performance ambient temperature Tq	25 °C
Maximum dimming level	0% (digital)


## Product Data

Full product code	871869634713300
Order product name	BDP104 LED70/740 DRW PCC GR D9 62P
EAN/UPC – product	8718696347133
Order code	34713300
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
Material no. (12 NC)	910925863302
SAP net weight (piece)	7.610 kg




# TownGuide Performer

## Dimensional drawing

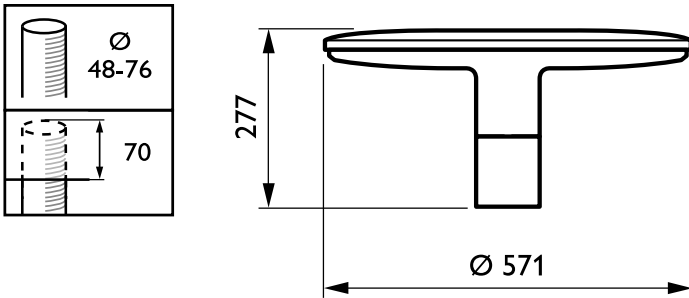


TownGuide Performer BDP100-105

## Photometric data



OFPL1\_BDP104PCC1xLED70740DRW



OFPC1\_BDP104PCC1xLED70740DRW

