



# Ledinaire Batten

## BN013C LED15S/840 L900

840 neutral white

The Ledinaire range contains a selection of popular off-the-shelf LED luminaires that comes with high Philips quality levels at a competitive price. Reliable, energy-efficient and affordable – just what you need. Both integrated (BN012C) and TLED-based (BN060C) versions are available

### Product data

General Information	
Beam angle of light source	- °
Light source colour	840 neutral white
Cap base	G13 [ Medium Bi-Pin Fluorescent]
Light source replaceable	No
Number of gear units	1 unit
Driver/power unit/transformer	PSU [ Power supply unit]
Driver included	Yes
Optic type	VWB [ Very wide beam]
Luminaire light beam spread	154°
Control interface	-
Connection	Push-in connector 2-pole
Cable	-
Protection class IEC	Safety class II
Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	F [ For mounting on normally flammable surfaces]
CE mark	CE mark
ENEC mark	-
Warranty period	5 years
Constant light output	No

Number of products on MCB (16 A type B)	10
EU RoHS compliant	Yes
Unified glare rating CEN	26

### Operating and Electrical

Input Voltage	220 to 240 V
Input frequency	50 or 60 Hz
Initial CLO power consumption	- W
Average CLO power consumption	- W
Inrush current	4.32 A
Inrush time	0.046 ms
Power factor (min.)	0.9

### Controls and Dimming

Dimmable	No
----------	----

### Mechanical and Housing

Housing material	Polycarbonate
Reflector material	Polycarbonate
Optic material	Polycarbonate

## Ledinaire Batten

Optical cover/lens material	Polycarbonate
Fixation material	-
Optical cover/lens finish	Opal
Overall length	912 mm
Overall width	30 mm
Overall height	36.5 mm
Colour	White
Dimensions (height x width x depth)	37 x 30 x 912 mm (1.4 x 1.2 x 35.9 in)

### Approval and Application

Ingress protection code	IP20 [ Finger-protected]
Mech. impact protection code	IK02 [ 0.2 J standard]

### Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	1500 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	100 lm/W
Init. Corr. Colour Temperature	4000 K
Init. Colour rendering index	≥80
Initial chromaticity	0.3738, 0.3728, SDCM≤5
Initial input power	15 W
Power consumption tolerance	+/-10%

### Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life	7.50 %
	50,000 h

Lumen maintenance at median useful life*	L65
	50,000 h

### Application Conditions


Ambient temperature range	-20 to +35 °C
Performance ambient temperature Tq	25 °C
Maximum dimming level	Not applicable
Suitable for random switching	Not applicable

### Product Data

Full product code	871016334956599
Order product name	BN013C LED15S/840 L900
EAN/UPC – product	8710163349565
Order code	34956599
SAP numerator – quantity per pack	1
Numerator – packs per outer box	25
Material no. (12 NC)	911401836180
SAP net weight (piece)	0.230 kg



## Dimensional drawing

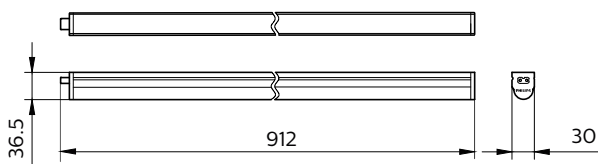

Batten BN060C

## Ledinaire Batten

